

## **SPECIFICATION**

### 868MHz ISM Band Dipole Antenna

Part No. : **OMB.868.B05F21** 

Product Name : Barracuda 5dBi 868MHz ISM Band Indoor/Outdoor

**Omnidirectional Antenna** 

Feature : Suitable to use in robust outdoor environment

Dimensions: Height 1093.5mm

**RoHS** compliant





### 1. Introduction

The Barracuda 868MHz ISM Outdoor antenna is designed to a have a long distance coverage. Omni-directional high gain across all bands ensures constant reception and transmission. The UV resistant coating with fiberglass housing makes this antenna suitable to be mounted in robust outdoor environment, pole-mounting and wall-mounting bracket is included.

The antenna finds its usage in metering, industrial monitoring and security applications.

This antenna is suitable to use as part of narrow channel M2M Sigfox Network, for simple M2M management in cities. The main applications would be Smart Cities, Utilities, Public Transport.




# 2. Specification

ELECTRICAL						
Standard	ISM 868					
Band	860~870MHz					
Antenna Type	Collinear					
Gain(max)	5dBi					
Polarization	Vertical					
Impedance	50 ohms					
Max Input Power	50 watts					
VSWR	<1.5:1					
Radiation	Omnidirectional					
Vertical Beam-width	38 Deg					
Horizontal Beam-width	360 Deg					
Antenna Design	Dipole Array					
Internal Material	Copper					
Connector	N Type Female					
MECHANICAL						
Length	1094mm(Max)					
Base Diameter	70*55mm(Max)					
Antenna Weight(G.W)	680g					
Mounting Accessories(G.W)	70g					
Application	Indoor/Outdoor					
Radome Material	White Fiberglass					
Base Material	Aluminum					
Mount Style	Pole Mount/Wall Mount					
Mounting	Stainless Steel					
Wind Resistance	>150mph(>241km/h)					
Housing	Fiberglass					
ENVIRONMENTAL						
Storage Temperature	-20°C to +80°C					
Operating Temperature	-20°C to +60°C					
Operating Humidity	10%~80% non-condensing					
Storage Humidity	5%~80% non-condensing					




### 3. Antenna Characteristics

#### 3.1 Return Loss

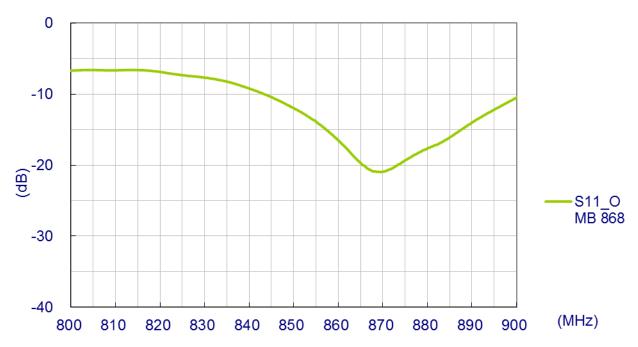


#### 3.2 Maximum Gain

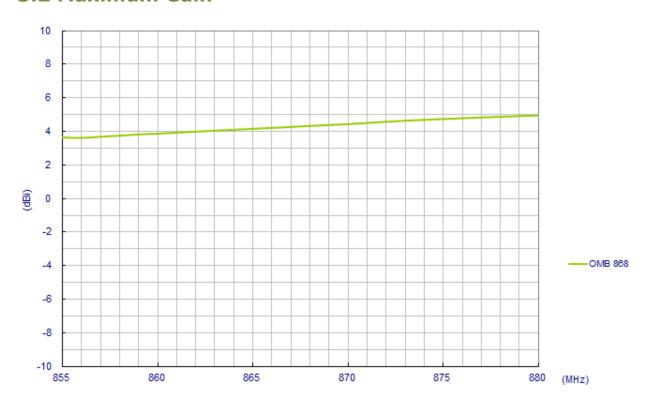




### 3.3 Average Gain

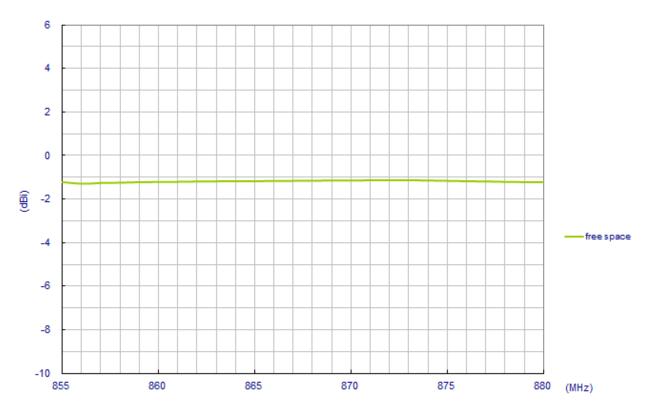


### 3.4 Efficiency

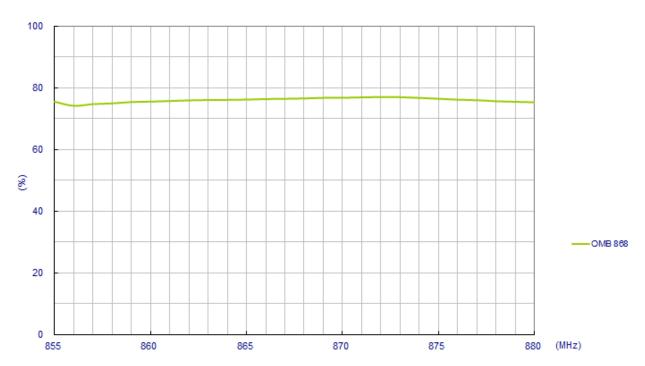




# 4. 3D Radiation Property

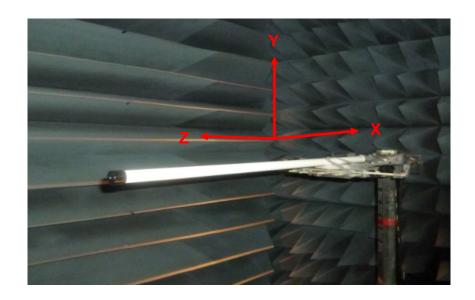




#### **XY Plane**

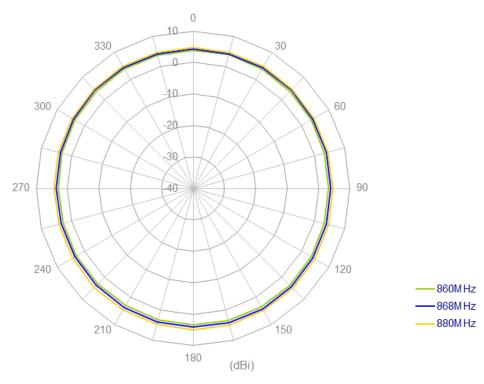


#### **XZ Plane**

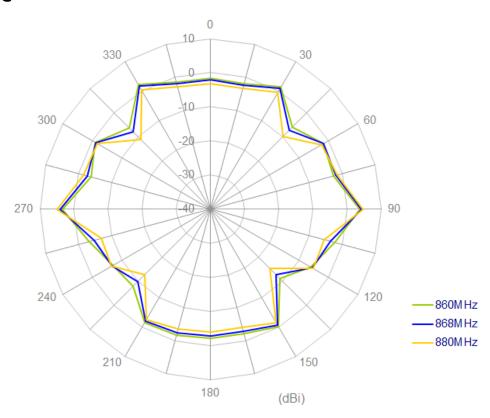



# 5. Drawing

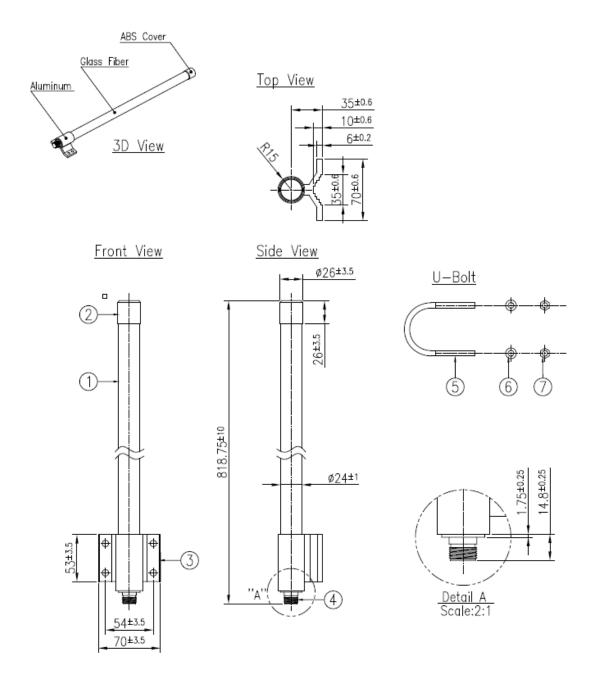

	Name	P/N	Material	Finish	QTY
1	OMB.868 Antenna	001212B010021A	Glass Fiber	White	1
2	Cover	000111K000021A	ABS	Silver	1
3	Bracket	000312B000021A	Aluminum	Silver	1
4	N Type(F)	201211K000021A	Brass	Ni Plated	1
5	M6 U Bolt	000412B000021A	Stainless Steel	Silver	2
6	M6 Washer	000411K010021A	Stainless Steel	Silver	4
7	M6 Nut	000411K020021A	Stainless Steel	Silver	4



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.